

## **SITE CHARACTERIZATION FOR CO<sub>2</sub> GEOLOGIC STORAGE AND VICE VERSA - THE FRIO BRINE PILOT AS A CASE STUDY**

Christine Doughty

Earth Sciences Division  
Lawrence Berkeley National Laboratory  
Berkeley, California, USA 94720  
e-mail: [cadoughty@lbl.gov](mailto:cadoughty@lbl.gov)

### **INTRODUCTION**

Careful site characterization is critical for successful geologic sequestration of CO<sub>2</sub>, especially for sequestration in brine-bearing formations that have not been previously used for other purposes. Traditional site characterization techniques such as geophysical imaging, well logging, core analyses, interference well testing, and tracer testing are all valuable. However, the injection and monitoring of CO<sub>2</sub> itself provides a wealth of additional information. Rather than considering a rigid chronology in which CO<sub>2</sub> sequestration occurs only after site characterization is complete, we recommend that CO<sub>2</sub> injection and monitoring be an integral part of the site-characterization process.

The advantages of this approach are numerous. The obvious benefit of CO<sub>2</sub> injection is to provide information on multi-phase flow properties, which cannot be obtained from traditional site-characterization techniques that examine single-phase conditions. Additionally, the low density and viscosity of CO<sub>2</sub> compared to brine causes the two components to flow through the subsurface differently, potentially revealing distinct features of the geology. Finally, to understand sequestered CO<sub>2</sub> behavior in the subsurface, there is no substitute for studying the movement of CO<sub>2</sub> directly.

Making CO<sub>2</sub> injection part of site characterization has practical benefits as well. The infrastructure for surface handling of CO<sub>2</sub> (compression, heating, local storage) can be developed, the CO<sub>2</sub> injection process can be debugged, and monitoring techniques can be field-tested. Prior to actual sequestration, small amounts of CO<sub>2</sub> may be trucked in. Later, monitoring accompanying the actual sequestration operations may be used to continually refine and improve understanding of CO<sub>2</sub> behavior in the subsurface.

### **RECOMMENDED SITE CHARACTERIZATION ACTIVITIES**

Site characterization must address two issues: the ability to put a large quantity of CO<sub>2</sub> into the subsurface, and the ability to keep it there for a long time. CO<sub>2</sub> injection requires adequate permeability, which can be assessed by well logs, core analyses,

and single-well and interference pump tests. CO<sub>2</sub> storage requires adequate connected porosity, which can be assessed by core analyses and tracer tests. Immobilizing CO<sub>2</sub> in the subsurface for long-term geologic sequestration can be accomplished by four primary mechanisms: (1) *Structural trapping*: buoyant free-phase CO<sub>2</sub> is trapped beneath low-permeability layers or faults or in anticline structures. Knowledge of regional geology, geophysical imaging, and well logs provide this information. (2) *Mobility trapping*: multi-phase flow processes immobilize free-phase CO<sub>2</sub>. Multi-phase flow behavior of CO<sub>2</sub> and brine provides the best direct information for mobility trapping, but in its absence information from oil/brine systems may be helpful. (3) *Dissolution trapping*: CO<sub>2</sub> dissolves in brine and is no longer buoyant. Brine composition, which may be obtained by collecting undisturbed fluid samples, is needed to quantify CO<sub>2</sub> dissolution. (4) *Mineral trapping*: CO<sub>2</sub> reacts with rock minerals to form carbonate compounds. Mineral compositions and distributions, which may be obtained from core samples, are needed to quantify CO<sub>2</sub>/mineral chemical reactions.

Development and application of a numerical model concurrently with site characterization can be used for designing tests, predicting test outcomes to assess the current state of knowledge, and comparing model results to field observations to calibrate unknown parameters and to incorporate new features.

### **CASE STUDY - THE FRIO BRINE PILOT**

At the Frio brine pilot, conducted at the South Liberty field near Houston, Texas, 1600 metric tons of CO<sub>2</sub> were injected over a period of 10 days into a steeply dipping sand layer at a depth of 1500 m. At this depth, free-phase CO<sub>2</sub> is supercritical. The sand layer is on the flank of a salt dome, and laterally compartmentalized by sub-vertical faults. The pilot employed one injection well and one observation well, each perforated over 6 m in the upper portion of the 23-m thick sand. The two wells are separated laterally by about 30 m, with the injection well down-dip of the observation well (Hovorka et al., 2006). Historical oil production at depths around 2400 m provides structural information about the site. Site characterization activities for the Frio brine pilot are summarized in Table 1.

*Table 1. Site characterization activities at the Frio brine pilot.*

Activity	Monitoring	Information obtained
Review existing data related to historical oil production	3D seismic Wireline logs in regionally distributed wells	Structure of sand and shale layers surrounding salt dome Compartmentalization into fault blocks
Well log analysis	Wireline logs in injection and observation wells	Identify target sand layer and overlying shale caprock Extent, continuity, and variability of layers Using literature correlations, estimate permeability, porosity, relative permeability parameters
Core analysis from newly drilled injection well	Porosity Permeability Mercury intrusion	Calibrate well-log estimates of porosity Calibrate well-log estimates of permeability Capillary pressure/saturation relationship
Interference well test	Pressure transients	Confirm inter-well connectivity Flow properties of lateral boundaries Field-scale permeability Estimates of pressure increase during CO <sub>2</sub> injection
Aqueous-phase tracer test	Fluorescein break-through curve (BTC)	Single-phase dispersivity Porosity-thickness product of sand layer
CO <sub>2</sub> injection	Pressure transients CO <sub>2</sub> arrival at observation well RST (reservoir simulation tool) Cross-well seismic VSP (vertical seismic profile)	Two-phase flow properties Average CO <sub>2</sub> saturation between wells CO <sub>2</sub> saturation profiles at injection and observation wells CO <sub>2</sub> distribution between injection and observation wells CO <sub>2</sub> distribution updip of observation well
Two-phase tracer test (concurrent with CO <sub>2</sub> injection)	Two-phase tracer BTC	Two-phase dispersivity Evolution of CO <sub>2</sub> saturation distribution with time

Numerical modeling was used to help determine parameters of the CO<sub>2</sub> injection, and to design the site-characterization well test and tracer test (Doughty, 2005). As field work proceeded, model results were compared to field data, and the model was modified to incorporate new information.

Figure 1 illustrates single-phase site-characterization activities, specifically, an interference well test and a doublet tracer test (Trautz et al., 2005). The well test confirms core-scale permeability measurements on the order of 2 Darcies, and modeling suggests that a small fault within the main fault block should not be considered a closed boundary. The maximum pressure increases seen in the injection and observation wells may be used for equipment design and to ensure regulatory compliance during CO<sub>2</sub> injection. Matching the tracer test with a streamline model produces a small single-phase dispersivity and a large porosity-thickness product, implying that the sand is highly homogeneous and that the effective sand thickness between the injection and observation wells is greater than the 5.5 m inferred from well logs.

Figure 2 shows a time series of RST logs at the injection and observation wells, along with the corresponding model results for CO<sub>2</sub> saturation. The wireline reservoir saturation tool (RST) uses pulsed neutron capture to determine changing brine saturation as brine is displaced by CO<sub>2</sub> (Sakurai et al., 2005). The magnitude of CO<sub>2</sub> saturation provides constraints on two-phase flow properties, whereas the depth at which CO<sub>2</sub> appears provides valuable insights into geology. At the injection well, CO<sub>2</sub> extends below the perforated interval, suggesting that a thin marker bed located just below the perforations does not have nearly as low a permeability as inferred from well logs. In the observation well, CO<sub>2</sub> arrives almost 1 m shallower than predicted by the model, suggesting that a low-permeability layer identified just above the perforations in both wells may not be continuous. These findings are consistent with the large sand-layer thickness inferred from the single-phase tracer test, but only the CO<sub>2</sub> injection provides specific information about how this greater thickness arises.

Figure 3 compares vertical seismic profile (VSP) results for the far-field  $\text{CO}_2$  distribution two months after  $\text{CO}_2$  injection with model results. The change in amplitude of the seismic response is plotted as a function of offset from the injection well, along three azimuthal angles (Daley et al., 2005). We do not have a quantitative relationship between VSP change in amplitude and  $\text{CO}_2$  saturation, so the vertical axes of the plot are adjusted to align these two quantities close to the injection well. Figure 3 shows good agreement between model and VSP in the updip direction (N), but the VSP indicates that the plume has moved farther than the model predicts to the NE and NW. In fact, the plume has moved as far to the NW as it has to the N, suggesting that either our notion of the true dip direction is inaccurate, or that there is significant heterogeneity or anisotropy in the permeability distribution beyond the immediate vicinity of the wells.

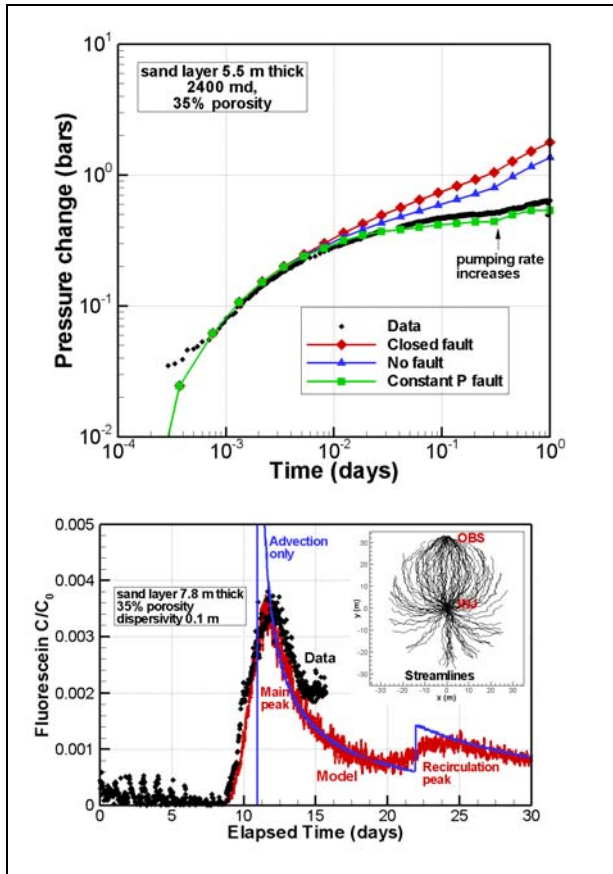


Figure 1. Top frame: Observation-well pressure transient during interference well test and model results considering three different boundary conditions for a small fault near the wells. Bottom frame: Tracer test data and results of a streamline model.

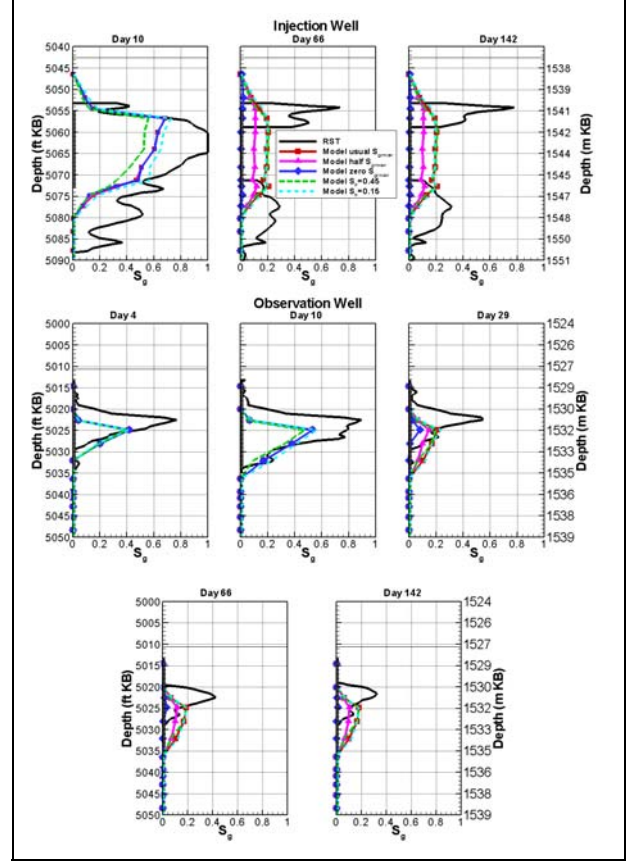


Figure 2.  $\text{CO}_2$  saturation profiles inferred from RST logs in the injection well (top row) and in the observation well (bottom two rows). The injection period is days 0-10. Late-time profiles in both wells are less quantitative, due to well workovers conducted following the end of the injection period. Model results considering different two-phase flow parameters are also shown.

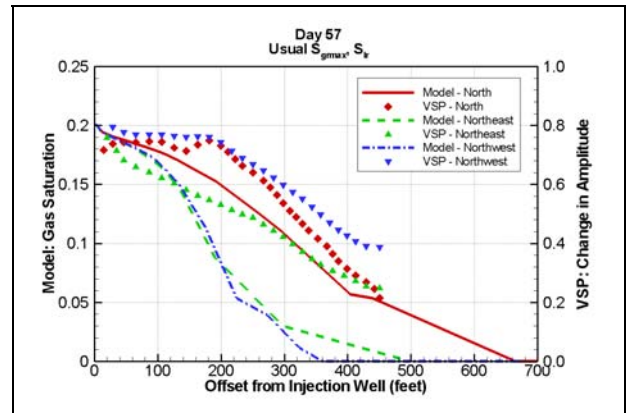


Figure 3. Comparison of VSP and model results for far-field  $\text{CO}_2$  distribution.

## **ACKNOWLEDGMENT**

Data provided by and stimulating discussions with members of the Frio brine pilot team are gratefully acknowledged, as is the review of this abstract by Curt Oldenburg. This work was supported by the Assistant Secretary for Fossil Energy, Office of Coal and Power Systems, through the National Energy Technology Laboratory, of the U.S. Department of Energy under Contract No. DE-AC02-05CH1123.

## **REFERENCES**

Daley, T.M., L.R. Myer, E.L. Majer, J.E. Peterson, 2005, Acquisition of time-lapse, 6-component, P- and S-wave, crosswell seismic survey with orbital vibrator and of time-lapse VSP for CO<sub>2</sub> injection monitoring, presented at 75th annual International Meeting of the Society of Exploration Geophysicists, Houston TX, Nov. 2005.

Doughty, C., Flow modeling for CO<sub>2</sub> sequestration: The Frio brine pilot, presented at AGU Fall Meeting, San Francisco, CA, December, 2005.

Hovorka, S.D. S.M. Benson, C. Doughty, B.M. Freifeld, S. Sakurai, T.M. Daley, Y.K. Kharaka, M.H. Holtz, R.C. Trautz, H.S. Nance, L.R. Meyer, K.K. Knauss, Measuring permanence of CO<sub>2</sub> storage in saline formations – The Frio experiment, *Environmental Geosciences*, in press, 2006.

Sakurai, S., T.S. Ramakrishnan, A. Boyd, N. Mueller, and S.D. Hovorka, Monitoring saturation changes of CO<sub>2</sub> sequestration: Petrophysical support of the Frio brine pilot experiment, presented at Society of Petrophysicists and Well Log Engineers 46th Annual Logging Symposium, New Orleans, LA, 2005.

Trautz, R.C., B.M. Freifeld, and C. Doughty, Comparison of single and multiphase tracer tests results from the Frio CO<sub>2</sub> pilot study, Dayton Texas, presented at National Environmental Technology Laboratory Fourth Annual Conference on Carbon Capture and Sequestration, Alexandria, VA, May 2-5, 2005.